



# SF6 P1:P

## SF6 LEAK DETECTOR

### Best Available SF6 Leak Detection

- Ultra high sensitivity with a  $1 \times 10^{-8}$  ml/sec\*
- Award winning Negative Ion Capture (NIC) technology
- 1 second rise and clear down for rapid leak detection
- Unaffected by large leaks and 100% SF6 meaning no frustrating delays between searches
- Choice of display units cc/ sec, gm/yr and ppm for monitoring conformance to leak minimization targets

### Ease of Use

- Non radioactive source for easy storage and transportation
- No training required - switch on and go
- Lightweight, ergonomically designed handgun
- Touch screen for easy navigation menus
- Simple data storage and printing for analysis

### Low Cost

- No argon or other pressurized gases required for reduced cost of ownership
- 2 year warranty when instrument registered online

\*Highsense option




SF6 LeakCheck P1:p is a revolution in SF6 leak detection, ensuring incredibly fast searching at ultra sensitive levels. Even the smallest of leaks can be detected and located swiftly with a minimum detection level of  $1 \times 10^{-7}$  ml/sec or optional  $1 \times 10^{-8}$  ml/sec, equivalent to a grain of rice per year!

Designed for SF6 gas leak testing and measurement in high voltage electrical SF6 switchgear, the instrument also detects other gases with a high affinity for electrons, such as refrigerant R12.

A unique advantage of the instrument is that it is unaffected by exposure to large leaks. Even after saturation or exposure to leaks of 100%, clear down remains rapid (<1s). The SF6 gas leak detector also benefits from having a non-radioactive source, eliminating registration, storage and transportation issues found with traditional radioactive ECD SF6 gas leak detectors.

Additional features of the SF6 gas leak detector include data-logging, alarms; both audio and visual, and a robust portable case. The instrument requires no consumables, such as Argon, reducing the ongoing costs of operation. There are no items requiring maintenance or service in the handgun or console.

The P1:p SF6 gas leak detector meets the demands for quality and traceability to international standards as required by today's industry. It is designed for the location, leak testing and measurement of SF6 leaks in high voltage electrical switchgear.

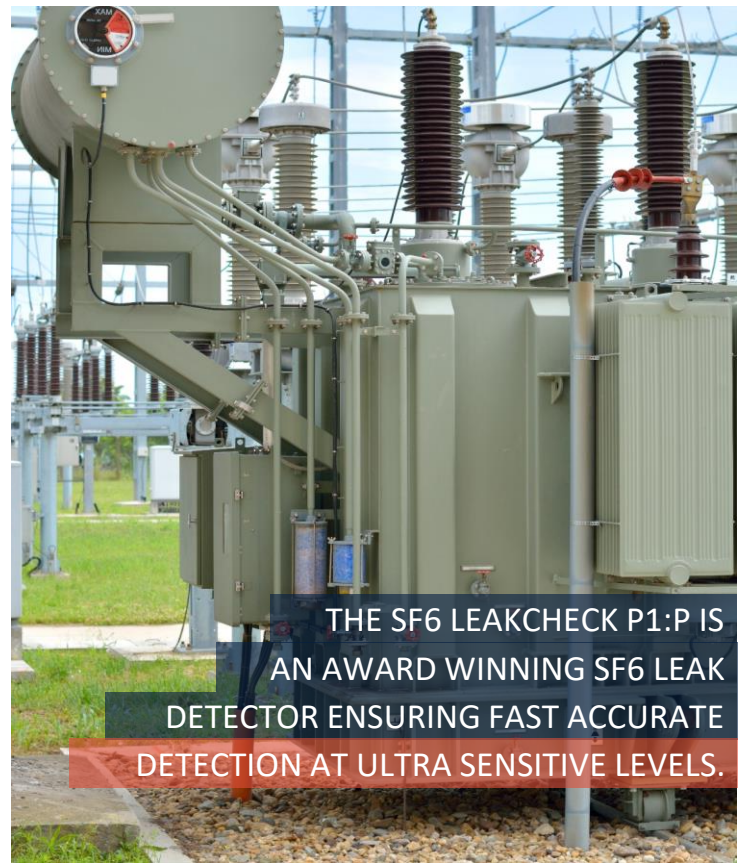

The instrument's award winning Negative Ion Capture (NIC) technology with non-radioactive source eliminates problems of registration, storage and transportation.

### Extend your instrument warranty

Your SF6 P1:p instrument warranty may be extended by simply registering your product on the Ion Science website within one month of purchase. Visit [www.ionscience.com/instrument-registration](http://www.ionscience.com/instrument-registration) to take advantage of this offer.

### Applications Include

- SF6 leak testing and measurement in high voltage switchgear (GIS)
- Breathing apparatus testing Medical device testing
- Leak integrity testing on medical, refrigeration and air conditioning equipment containing SF6 and (H)CFCs



# SF6 Leakcheck P1:p

Technical Specifications and Part Numbers

## MEASUREMENT PRINCIPLE

- Negative Ion Capture (NIC): a non-radioactive, nonrestricting carriage and
- no licensing required.

## SENSITIVITY

- Standard SF6 GasCheck P1 and LeakCheck P1:p
- 1 x 10<sup>-7</sup> ml/sec, 1 ppm, 0.01 gm/yr SF6
- Highsense option
- 1 x 10<sup>-8</sup> ml/sec, 0.1 ppm, 0.001 gm/yr SF6

## RESPONSE

- T90 = < 1 second rise and clear down

## OPERATION

- Lead acid battery, internal and fully protected
- Recharge between 85-265 AC V, 50/60Hz

## ALARM

- Audio and visual with an optional handset alarm

## MEASUREMENT UNITS

- Measures in ml/sec, gm/yr and ppm
- Range: each unit 1:500
- Accuracy: ± 5% of displayed leak rate or ± 2 digits
- Repeatability: ± 1 digit

## CALIBRATION

- Via CalCheck calibration accessory

## DATA LOGGING

- Over 500 data points with date and time stamp
- Download via RS232 to a PC

## TEMPERATURE

- Storage: -10 to 60 °C (14 to 140 °F)
- Operating: 0 to 50 °C (32 to 122 °F)

## DIMENSIONS

- SF6 LeakCheck P1:p
- Consol: 500 x 400 x 190 mm (19.7 x 15.7 x 7.5")
- Shipped: 520 x 430 x 210 mm (20.5 x 16.9 x 8.3")

## WEIGHT

- SF6 LeakCheck P1:p
- Shipped 15 kg (33 lb)



| SF6 Portable | Description                   |
|--------------|-------------------------------|
| LCP1-p HS    | Leakcheck P1:p Hi Sens Option |

| SF6 Portable Access. | Description   |
|----------------------|---|
| P1-100-0000          | Spare Probe Complete with Filter and Stainless Steel Tips |
| P1-100-0021          | P1 Front Filter PES (Pack of 10)                          |
| P1-100-0004          | Standard Probe Tip  |
| EXTEND 300           | 300mm Probe Tip Extender                                  |
| EXTEND 500           | 500mm Probe Tip Extender                                  |
| P1-100-0011          | SF6 Hose Filter Pack of 10                                |
| EXTEND 5             | 5m Extension Hose for SF6 P1p                             |
| EXTEND 10            | 10m Extension Hose for SF6 P1p                            |
| EXTEND 15            | 15m Extension Hose for SF6 P1p                            |
| P1-100-0013          | O-ring for All Lemo Connectors (Pack 10)                  |
| A-21520              | Cal Check SF6   |
| 5/BA-15              | Cal Check Canister 0.01% SF6                              |
| 5/BA-10              | Cal Check Canister 0.1% SF6                               |
| 5/BA-11              | Cal Check Canister 1.0% SF6                               |

| SF6 Portable Calibration & Repair | Description                   |
|-----------------------------------|-------------------------------|
| SF6 Refurbish                     | Refurbish Complete Sensorhead |



REPSS Corporate Office  
1656 Townhurst Dr, Suite E  
Houston, TX 77043

Unrivaled Gas Detection

46

Sales & Service  
866-657-3777  
customerservice@repss.com  
www.repss.com

V2.2  
Issue 2018